

XEH – Emergency Lighting Unit

▶ XEH Basics

- Dual Voltage 120/277
- Universal Mount
- 90 Minute PbCa Battery
- Adjustable heads to direct light to most useful areas
- (2) 5.4 Watt Incandescent Lamps provide Emergency Lighting

▶ Mounting Details

- Molded back mounting plate with universal J-Box mounting pattern and keyhole slots.
- Main housing snaps on to the back plate for ease of installation.

▶ Battery Details

- Maintenance free, Sealed Lead Calcium 6V battery provides a minimum 1 ½ hour emergency operation for Self-tPowered signs.
- Low voltage disconnect of the battery prevents deep discharge and maintains good battery life.
- Fully automatic, solid state charger.
- Test switch with LED charge indicator/AC voltage indicator.


▶ Why P2 for LED Exits?

- Always in Stock for Quick Ship
- Complete your relighting project bill of materials, kits, fixtures, indoor, outdoor, exits, with a single PO.

▶ Approvals

- UL924
- Life Safety NFPA 101
- UL Listed for Damp Location

▶ XEH – Emergency Lighting Unit

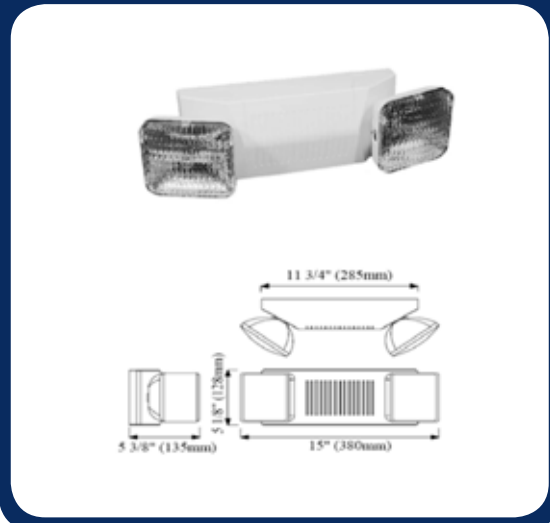

Ordering Information

XEH = Universal Volt/Mount, Emergency Lighting with (2) 5.4 W Adjustable Heads and Battery Backup